CATERPILLAR®

MINING DEALER BEST PRACTICE SERIES

Fabricated Tool to Remove and Install OHT Wheel Studs

Application | Maintenance | Site Management | **Component Rebuild** | Safety | MARC Management

March 07
0307-4.3-1071

1.0 Introduction

There is no Caterpillar designed tool to remove and install Off Highway Truck wheel studs from the flange except for the 797wheel group. For other models, the common practice is to remove the studs manually with a hammer. This process creates considerable noise in the shop, is time consuming, and fatiguing for the technician

Some dealers have designed a hydraulic press operated tool for stud removal and installation.

2.0 Best Practice Description

<u>Tooling required:</u>

Cat 3S6224 Hydraulic Pump Gp

Fabricated Tool for OHT 777-793

RC154 Hydraulic Cylinder 15 Ton Capacity

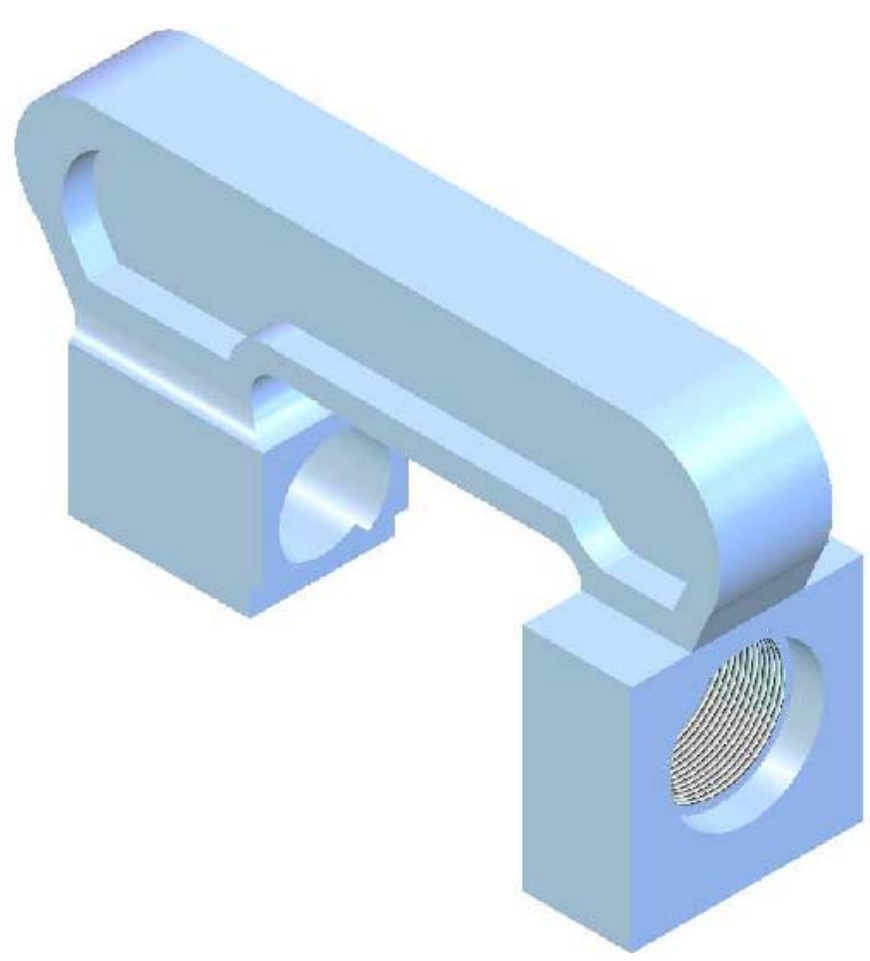

The process:

Tool used to remove a stud.

- To install studs, simply reverse the tool.
- Works on both front and rear wheel hubs.

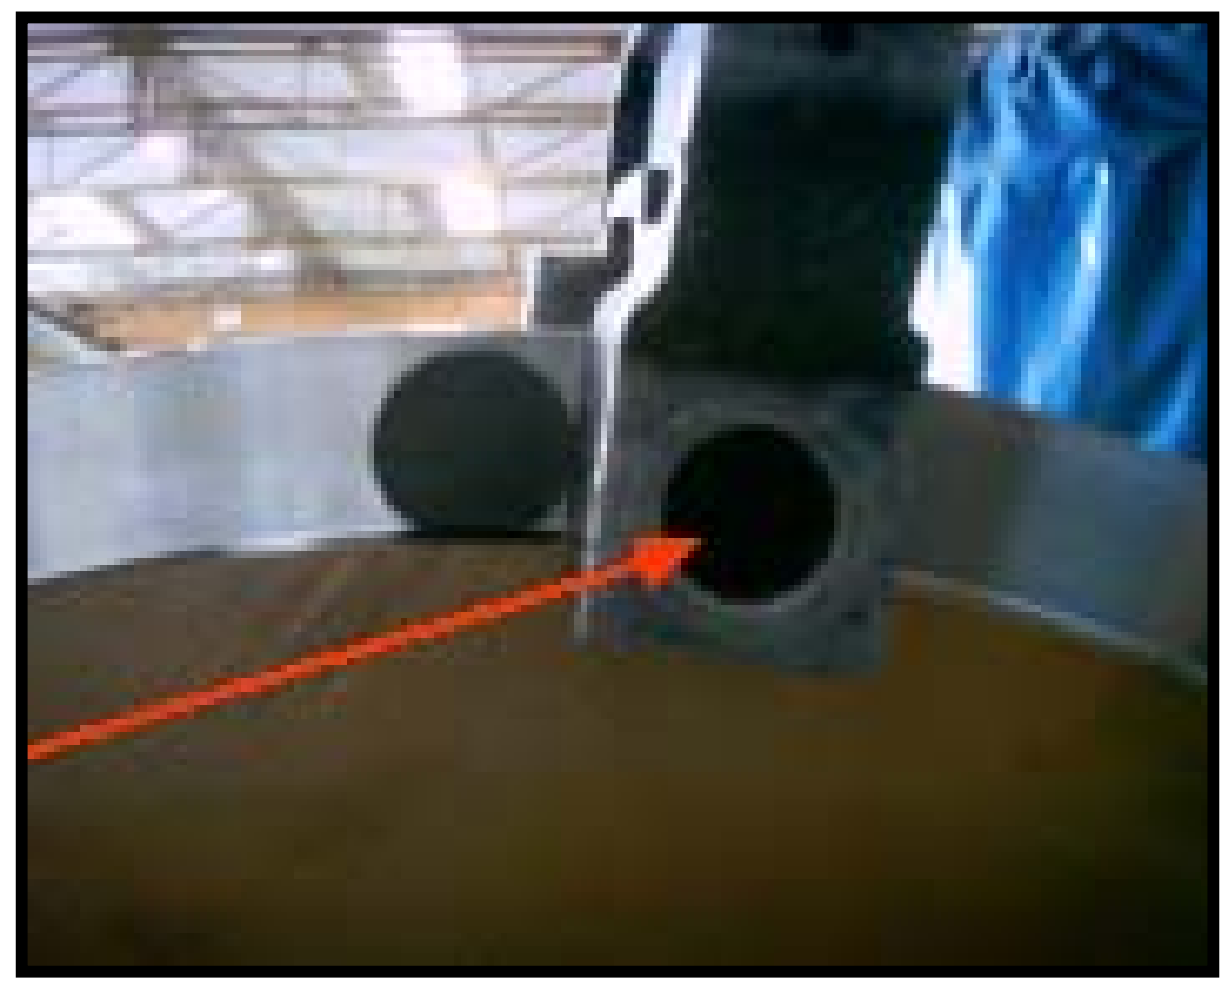

- Stud is pressed out through the machined hole in the base of the tool.

3.0 Implementation Steps

- It is necessary to fabricate the stud removal and installation tool.
- Drawing are attached to this Best Practice

4.0 Benefits

- Improves labor efficiency and requires less time to remove / install stud than manual methods.
- Reduces shop noise levels.
- Less fatiguing for the technician.

5.0 Resources Required

- Machine shop to fabricate the tool.

6.0 Supporting Attachments / References

Detail Design Drawings of Wheel Stud Removal & Installation Tool

- OHT RxI Wheel Stud Print Plano1.jpg
- OHT RxI Wheel Stud Print Plano2.jpg
- OHT RxI Wheel Stud Prints H-321-1.jpg

7.0 Related Best Practices

8.0 Acknowledgements

This Best Practice was written by
Dale Brehm
6 Sigma Black Belt
Caterpillar Global Mining
Brehm_dale_E@cat.com
+1.309.675.6325

Special thanks to the information provided by:
Gecolsa - CAT